



## SolarRoof, Adapter (Puck) for Corrugated Tin Roof


### Assembly

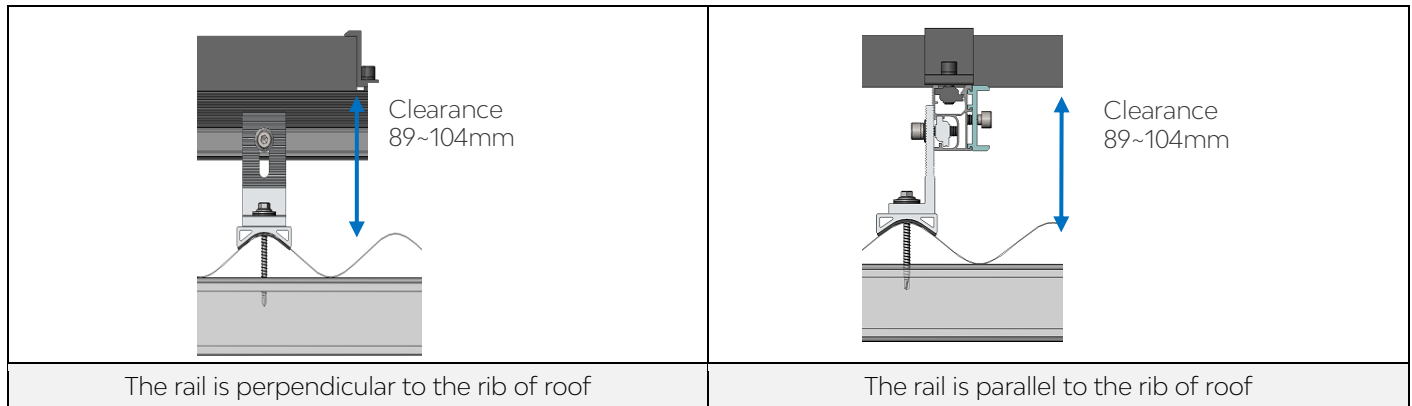

### Component

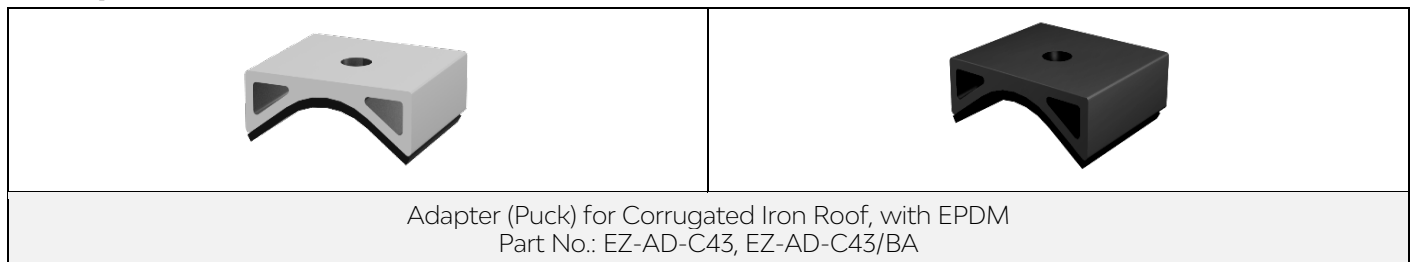

### Technical Specification

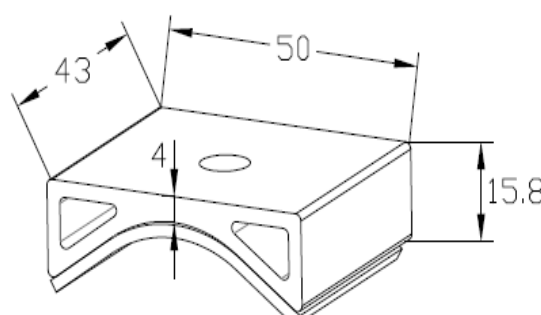Roof type	Corrugated Roof	
Fixing Method	Fixing into the metal purlin with Buildex 14-11 x 70 (14 gauge, 6.3 mm, 11 TPI, 70 mm long) Hex Head Zips Screw	
EPDM	Pre-fitted (2mm thickness)	
Dimensions	L50mm*W43mm*H15.8mm	
Weight	0.042kg	
Packaging	170 units per pack; 2 packs (340 units) per carton	
Material	AL6005-T5	
Color	Silver (anodized, no less than 10 μm) Black (full anodized)	
Standard	AS NZS1170.2-2011	