

# Installation Guide

## PostMount 8-A



# // Introduction

## Contents

|   |                          |    |
|---|--------------------------|----|
| 1 | Introduction             | 1  |
| 2 | Tools & Components       | 2  |
| 3 | System Overview          | 3  |
| 4 | Installation Instruction | 6  |
| 5 | Certification            | 12 |

Clenergy PV-ezRack® PostMount 8-A is a ground mounting system suitable for large scale commercial and utility scale installations. PV-ezRack® PostMount 8-A has been developed to fit any PV module in the outdoors and uneven ground areas. PV-ezRack® PostMount 8-A have good compatibility for the different region via the angle adjustment (10°~60°). Using high quality engineered components PostMount 8-A saves developers and installers, time and money when delivering large scale projects.

Please review this manual thoroughly before installing PostMount 8-A. This manual provides the following contents:

- 1) Installation planning;
- 2) Installation instructions.

The PV-ezRack® PostMount 8-A parts, when installed in accordance with this guide, will be structurally adequate and meet the AS/NZS 1170.2: 2021 standard. During installation, and especially when working on the ground, please comply with the appropriate occupational health and safety regulations. Please also pay attention to other relevant regulations in your local region. Please check that you are using the latest version of the installation manual by contacting Clenergy via email on [www.clenergy.com.au](http://www.clenergy.com.au) or contacting your local distributor.

## The installer is solely responsible for:

- Complying with all applicable local or national building codes, including any updates that may supersede this manual;
- Ensuring that PV-ezRack® and other products are appropriate for the particular installation and the installation environment;
- Using only PV-ezRack® parts and installer supplied parts as specified by PV-ezRack® project plan (substitution of parts may void the warranty and invalidate the letter of certification);
- Recycling according to the local relative statute;
- Ensuring that there are no less than two professionals working on panel installation;
- Ensuring the installation of related electrical equipment is performed by licenced electricians;
- Ensuring safe installation of all electrical aspects of the PV array, including providing adequate earth bonding of the PV array and PV-ezRack® PostMount components as required in AS/NZS 5033: 2021.

## Product Warranty:

Please refer [PV-ezRack® Product Warranty](#) on our website.

## // Tools and Components

### Tools


|                                                                                   |                                                                                   |                                                                                   |                                                                                    |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|  |  |  |  |
| Allen Key 6 mm                                                                    | Spanner                                                                           | Torque Spanner                                                                    | 5m Tape                                                                            |

### Components

|                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                      |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|   |  |  |  |  |
| ER-R-ECO/XXXX<br>ECO-Rail x 6                                                       | ER-RT-100/2900<br>PM8A,Tube-Master x 1                                              | ER-RT-70/2600<br>PM6A,PM8A,Tube-LS x 3                                              | ER-P-152/3000<br>Pole for PM8A x 1                                                   | ER-SC-PM6/PM8<br>PM6A,PM8A,Steel Cap<br>Assy x 1                                     |
|  |  |  |                                                                                      |                                                                                      |
| ER-RT-100/576<br>PM6-A, PM8-A<br>Adjustable Tube x 1                                | C-U/30/46-G<br>Akashi Clamp 30-46mm-<br>Gnd Clip x 30                               | EZ-GL-ST/UC<br>Grounding Lug with CE<br>Logo and U Channel x 6                      |                                                                                      |                                                                                      |


## // System Overview

### PostMount 8-A

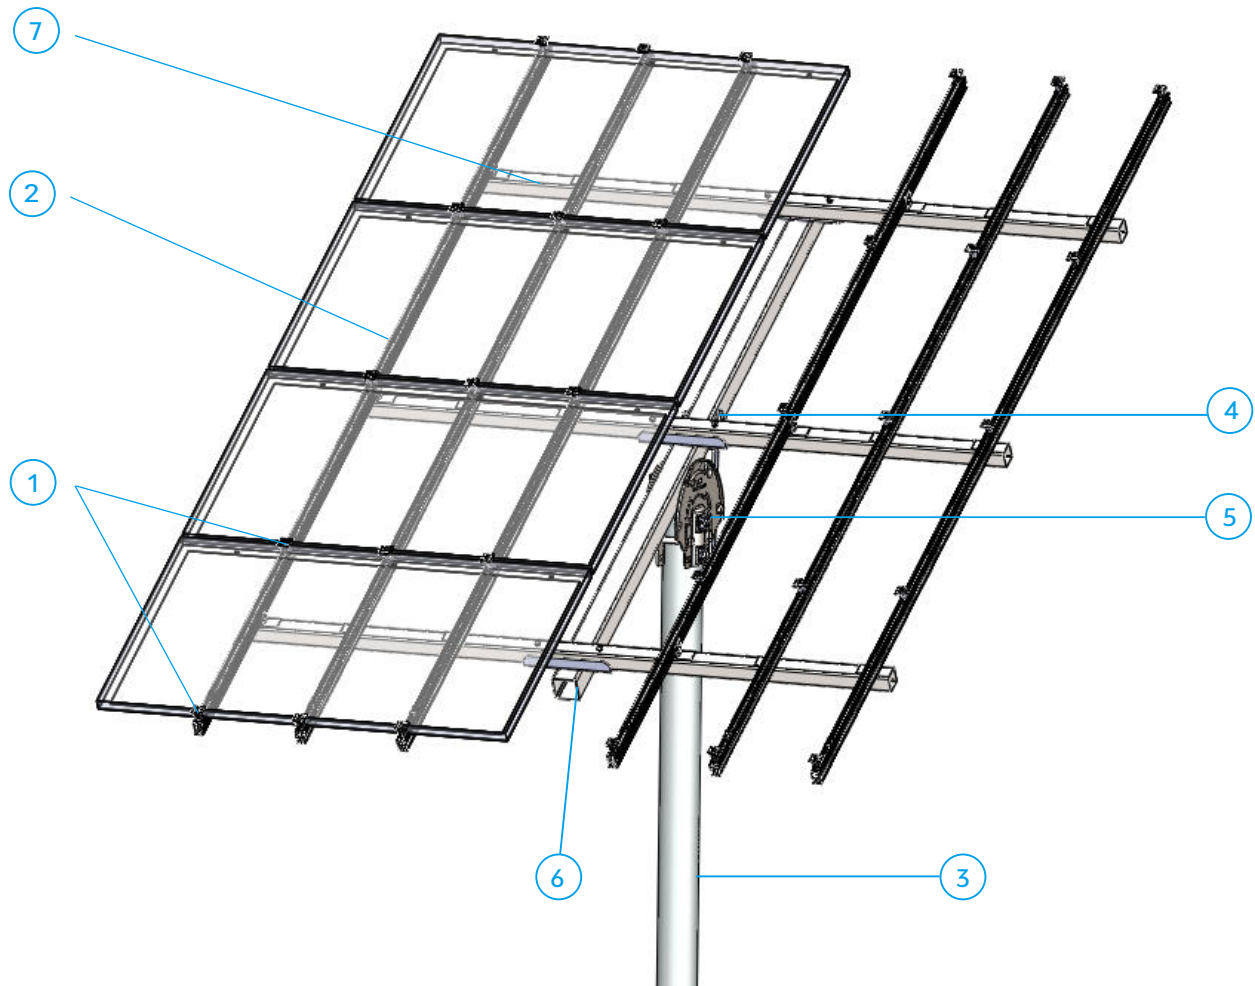

- ① Akashi Clamp    ② ECO-Rail    ③ Pole    ④ Adjustable Tube    ⑤ Steel Cap Assembly    ⑥ Rectangular Tube-Master  
⑦ Rectangular Tube- Landscape

Side view drawing of PV-ezRack® PostMount 8-A is shown below. The panels tilt angle and embedment depth below are for reference only. Please refer to Certificate Letter to obtain the certified max panels tilt angle and min embedment depth for different wind regions and different soil types.

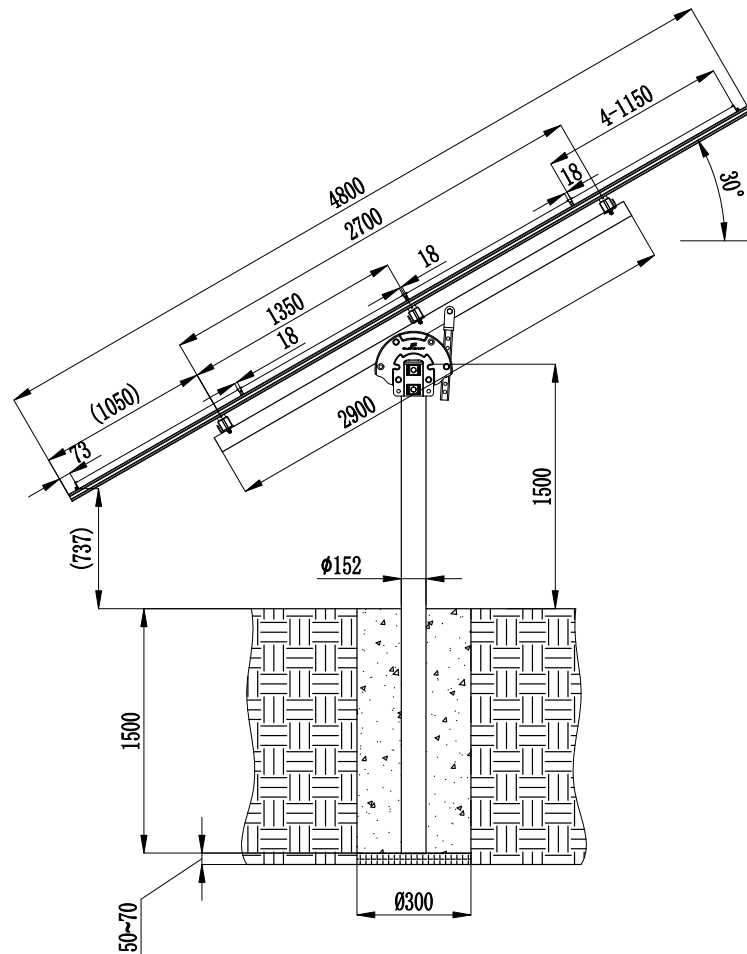

## Precautionary Measures for Stainless-Steel Fastener Installation

Improper operation may lead to the deadlock of bolts and nuts. Follow the steps below to reduce this risk.

Reduce the friction coefficient


- (1) Ensure that the thread surface is clean (no dirt or contaminant).
- (2) Apply lubricant (grease or 40# engine oil) to fasteners prior to tightening to avoid galling or seizing in the threads.

## General installation instructions

- (1) Apply force to fasteners in the direction of thread.
- (2) Apply force uniformly to maintain required torque.
- (3) Professional tools and tool belts are recommended.
- (4) Avoid using electric tools for final tightening.
- (5) Avoid working at high temperatures.

## Safe Torques

Please refer to safe torques defined in this guide as shown in the figure below. If power tools are required, Clenergy recommends the use of low speed only. High speed and impact drivers increase the risk of bolt galling (deadlock). If deadlock occurs and you need to cut fasteners, please make sure that there is no load on the fastener before you cut it. Avoid damaging the anodized or galvanized surfaces.

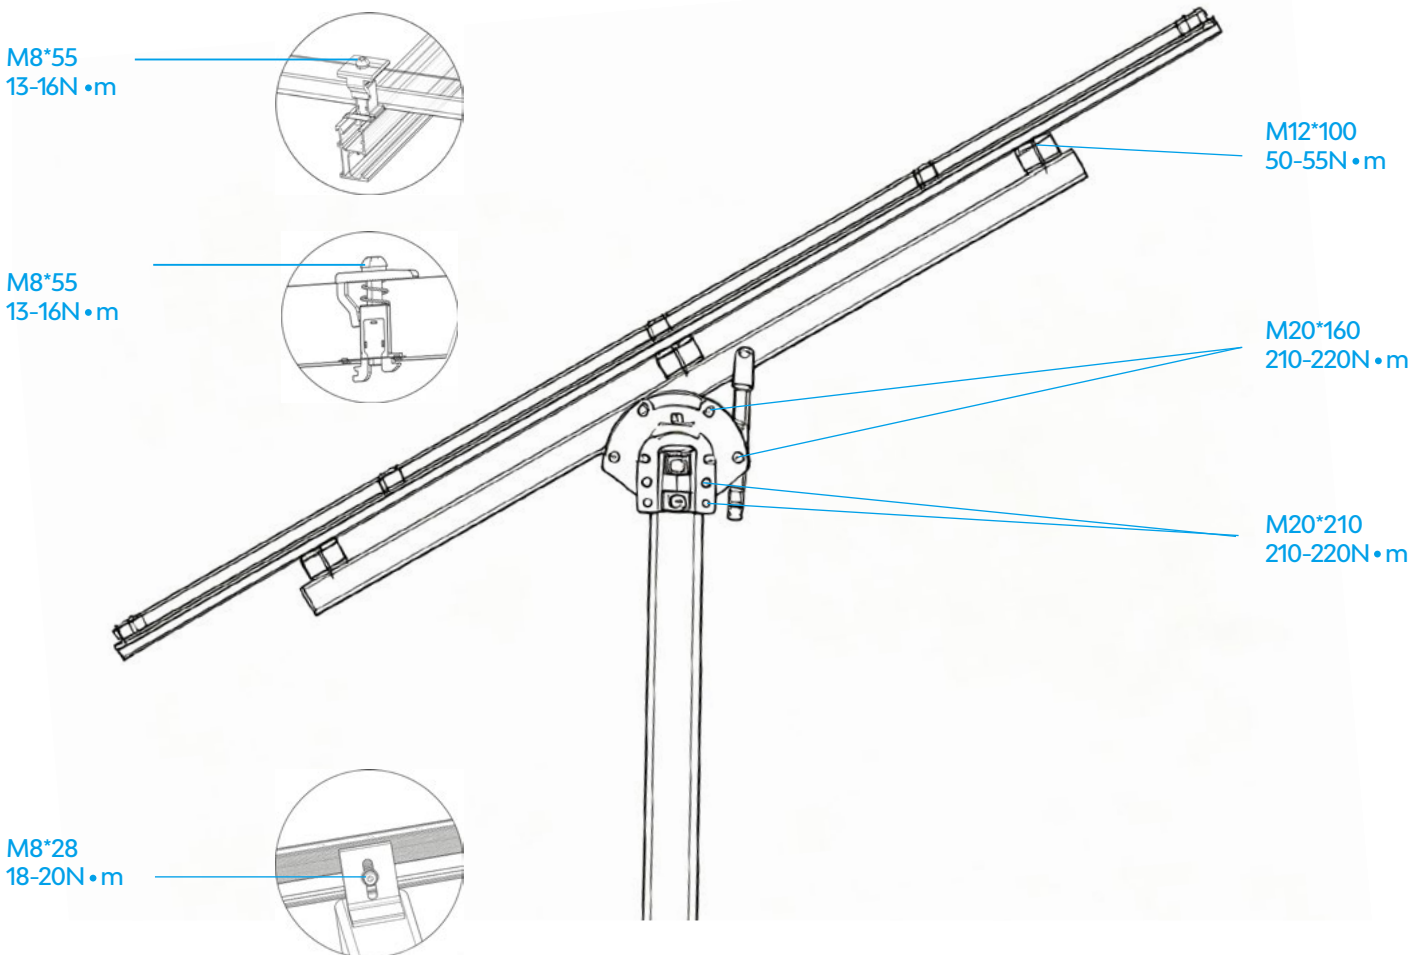

## Installation Dimensions


All drawings and dimensions in this installation guide are for generic reference. The PV-ezRack® PostMount 8-A is to be optimized to suit specific conditions for each project and documented in engineering drawings. As a result, major components of the PV-ezRack® PostMount 8-A may be provided in sectional sizes and lengths that vary from those shown in this guide. The installation operations detailed in this instruction guide remain the same regardless of the component size. In case you need to do any on-site modifications or alteration of the system in a way that would be different from engineering drawings, please provide marked up drawings/sketches for Clenergy's review prior to modification for comment and approval.

# // Installation Instructions

## Pole Installation

Dig a hole with the diameter of 300mm .

Place the pole into the middle of the hole and fill it with concrete (min 25 MPa strength). Maintain the position of the post. The allowed vertical tolerance is  $\pm 2^\circ$ . Keep the axle of the 2-  $\varnothing 22$  holes parallel to East-West; keep the vertical angle deviation within  $\pm 5^\circ$ . For more than one system on one site maintain all the axles of 2-  $\varnothing 22$  holes aligned.

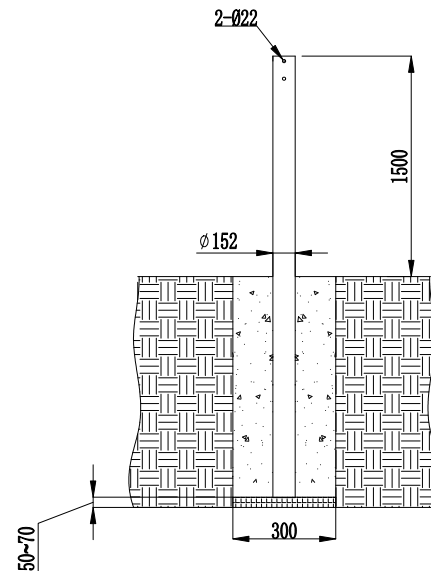


## Steel Cap Installation

Connect the Pole to the corrugated washer and Steel Cap Assembly with M20\*210 hexagonal bolt, spring washer 20, M20 nut .

Combine two Steel Caps with M20\*160 hexagonal bolt, spring washer 20, M20 hex nut.

### Note:

1. Do not fasten the Bolt prior to complete the assembly of PM8-A Rectangular Tube-Master.
2. Keep all the Bolt head aligned.

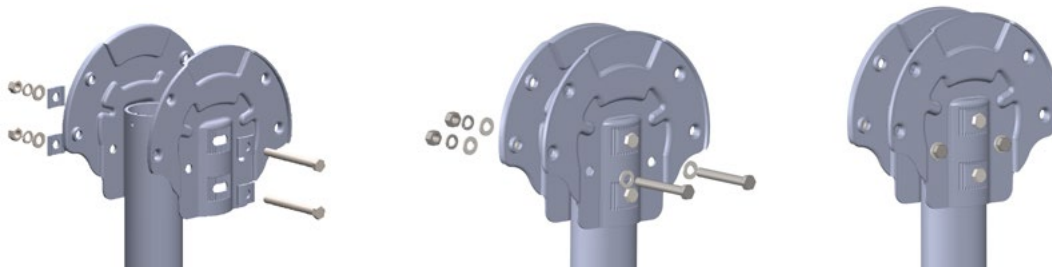

## PM8-A Rectangular Tube-Master Installation

1) Fix the Rectangular Tube-Master at Steel Cap Assembly with M20\*160 hex bolt, M20 nut, plain washer 20, and spring washer 20. See the mark (1).

2) Fix the Adjustable Tube at Rectangular Tube-Master with M20\*160 hex bolt, plain washer 20, and spring washer 20, M20 nut. See the mark (2).

3) Fix the Adjustable Tube at Steel Cap Assembly with M20\*160 hex bolt, M20 nut, plain washer 20, and spring washer 20. See the mark (3).

Realized the angle adjustment by position the bolt in the different holes.




4) Fasten the Steel Cap Assembly to Pole with M20\*210, M20\*160 Hex Bolt, keep the Rectangular Tube-Master parallel to the south-north by adjust the Steel Cap Assembly.

Recommended torque for M20 bolts is 210~220 N·m.

### Note:

1) Adjust the angle of the allation, the angle of the Rectangular Tube-Master with 10°(6 holes from up to bottom corresponds to 10° to 60° tilt angle) in order to make the assembly process run smooth.

2) Using adjustable washers to fill gaps between the Rectangular Tube-Master and the Adjustable Tube and Steel Cap. Image on the right shows adjustable washers inserting between the Rectangular Tube-Master and Steel Cap.

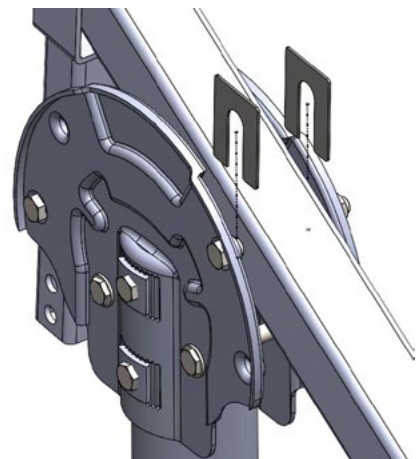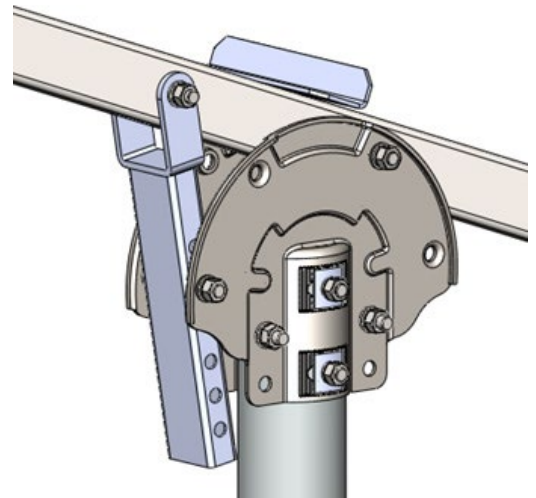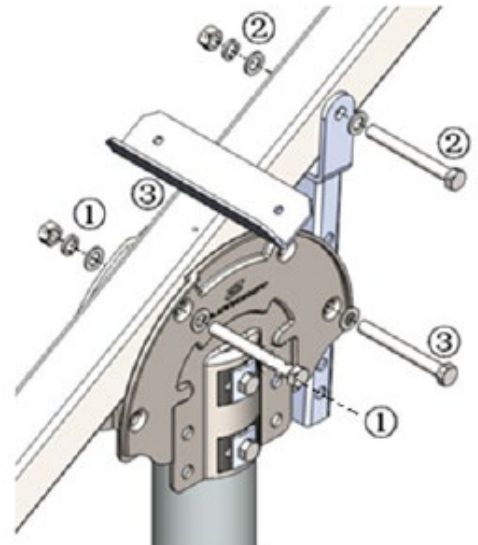


## Rectangular Tube-Landscape Installation

Fix the 3pcs PM8-A Rectangular Tube-Landscapes at Rectangular Tube-Master on pre-welded L profile angle bracket with 2pcs M12\*100 hex bolts, 2pcs M12 nuts, 2pcs plain washers 12 and 2pcs spring washers 12. Do not fasten the Nut until 3 Rectangular Tube-Landscapes aligned.

**Note:**

Adjust the Rectangular Tube- Landscapes until the dimension  $D1=D2=D3=D4$ .

Recommended torque for M12 bolts is 50~55 N·m

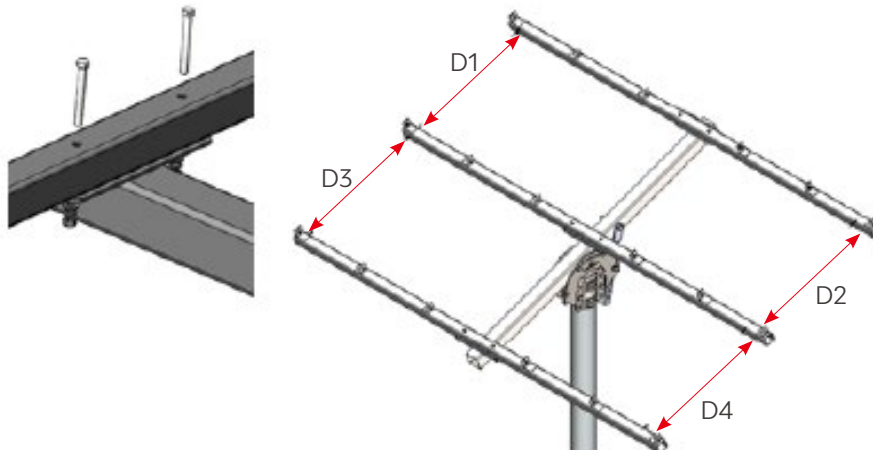


## ECO-Rail Installation

Fix the ECO-Rail to Rectangular Tube-Master with M8\*28 hex socket bolt, Z module, Spring washer 8, Washer 8.

**Note:**

Make sure that the rail ends align horizontally and that the rails are parallel to each other.

Recommended torque for M8 bolts is 18~20 N·m.

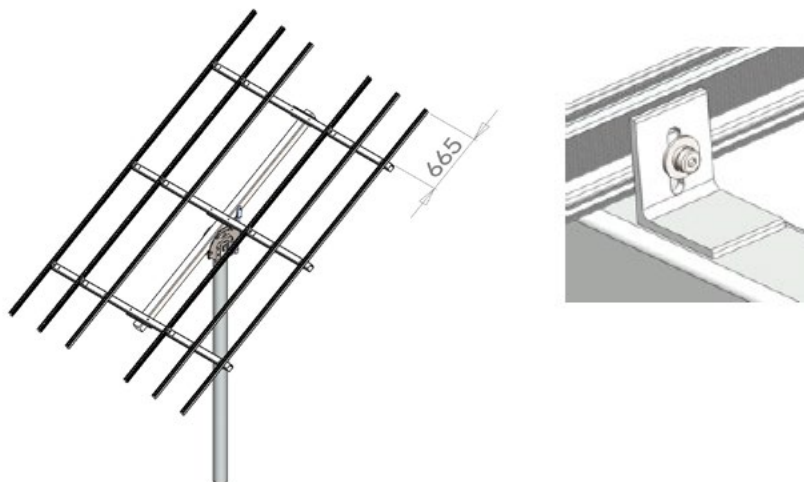


## PV Module Installation

Fix the PV panel to Rail, via Akashi Clamps step by step until all the panels complete.


Recommended torque for M8 bolts is 13~16 N·m



End Clamp

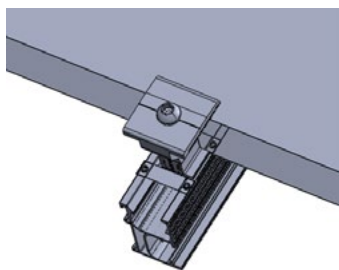

Inter Clamp

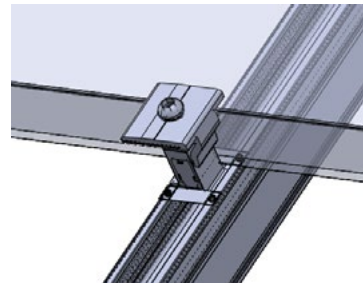


**Note:**

The Akashi Clamp can be used both as a End Clamp and a Inter Clamp, and the height can be adjusted from 30 to 46 mm.

When the side of the Akashi Clamp close to the narrow side of the Akashi Clamp Buckle, it can be used as End Clamp, and when the side of the Akashi Clamp close to the wide side of the Akashi Clamp Buckle, it can be used as inter clamp, as shown in the figure below. The Akashi Clamp can be directly rotated to the position of required End or Inter Clamp.

Recommended torque for M8 bolts is 13~16 N·m

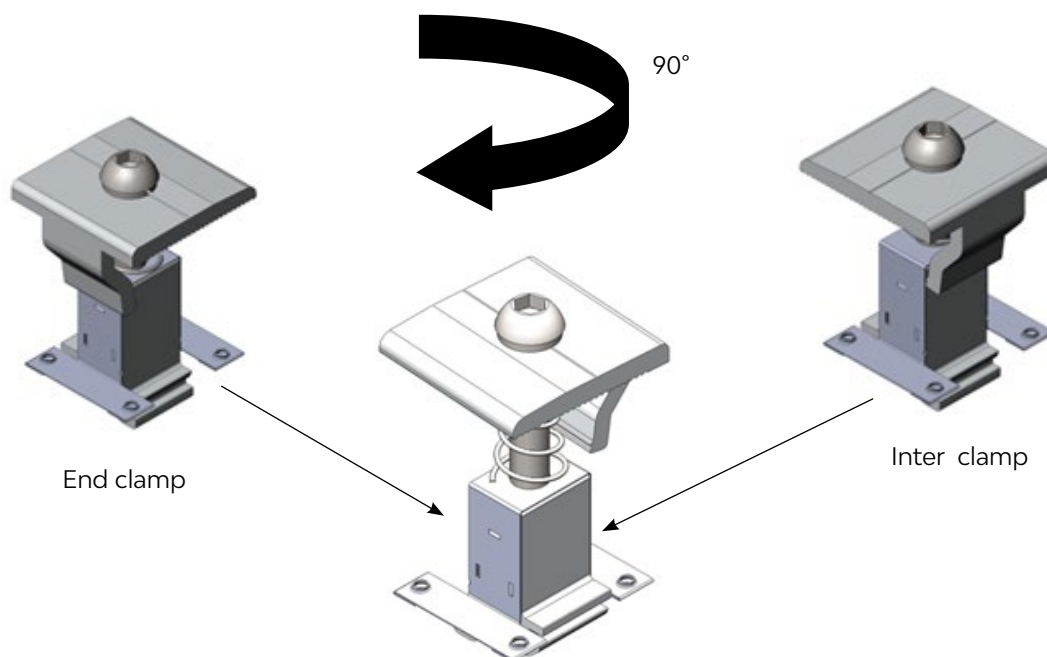

Apply one pre-assembled Grounding Lug per Rail. Click the Grounding Lug into to the rail channel and insert the Copper Wire. ( the maximum size is  $10 \text{ mm}^2$  ) Fasten the bolt M6\*14 with 5~6 N.m and the bolt M8\*55 with 13~16 N.m.

## Grounding Lug Installation

The recommended fasten torque of the bolt M8\*25 is 16~20 N.m.

Once grounding lug fixing with rail, insert U-Shape Copper Channel into grounding lug as shown in Figure 17. Strip earthing cable (the maximum size is  $10 \text{ mm}^2$ ), insert the conductor into the Copper Channel and tighten the bolt M6\*14 with 5~6 N.m to ensure the earthing cable is tight.

Note: Please check the electrical resistance between rail and earthing cable conductor to ensure the bonding is made.

There are three options for Grounding Lug installation.


### Solution 1

Fix the Grounding Lug at the end of the rail as shown in the figure on the right.




## Solution 2

Fix the Grounding Lug on the rail directly beneath the PV Module as shown in the figure on the right.



## Solution 3

Fix the Grounding Lug in the side channel of the rail as shown in the figure on the right.



# // Certification



REF: CL-825-S-REV1  
Internal REF: 00569

25 May 2023

Client: **Clenergy Australia**  
1/10 Duerdin Street  
Clayton, VIC 3168

## Array Frame Engineering Certificate

### Postmount PM8-A Installation

MW Engineering Melbourne Pty Ltd, being Structural Engineers within the meaning of Australian and NZ Building Regulations, have carried out a structural design check of the PV-ezRack Postmount PM8-A within Australia. The design check has been based on the information in the *PV-ezRack PM8-A Planning and Installation Guide* and schematic drawings of the system components, provided by Clenergy Australia.


| Part Number      | Part Number (sub-component) | Item Description                                                         |
|------------------|-----------------------------|--------------------------------------------------------------------------|
| ER-R-ECO/XXXX    |                             | PV-ezRack ECO Rail, length XXXX                                          |
| R-ECO/XXXX/AUMF  |                             | PV-ezRack Australian Made Mill Finish ECO Rail, length XXXX              |
| ER-SP-ECO        |                             | PV-ezRack Splice for ECO-Rail                                            |
| ER-EC-STXX       |                             | PV-ezRack End Clamp - Standard XX                                        |
| ER-IC-STXX       |                             | PV-ezRack Inter Clamp - Standard XX                                      |
| ER-RT/SC/AP-PM8A | ER-RT-70/2600               | PV-ezRack PM6-A&PM8-A, Rectangular Tube-Landscape 70*70*2600mm           |
|                  | ER-RT-100/2900              | PV-ezRack PM8-A, Rectangular Tube-Master 100*100*2900mm                  |
|                  | ER-RT-100/576               | PV-ezRack Postmount 6-A&8-A, Adjustable Tube 100*50*576mm                |
|                  | ER-SC-PM6/PM8               | PV-ezRack PM6-A, PM8-A, Steel Cap Assembly                               |
|                  | ER-AP-PM6/8/A               | PV-ezRack PM6-A&PM8-A, Accessory Package                                 |
|                  | EZ-GL-ST/UC                 | PV-ezRack Grounding Lug, with Clenergy Logo, with U-Shape Copper Channel |
|                  | EZ-GC-ST                    | PV-ezRack Grounding Clip, with Clenergy Logo                             |
| ER-P-152/3000    |                             | PV-ezRack, Pipe Ø152*3000mm                                              |
| C-U/30/46-G      |                             | PV-ezRack, Akashi Clamp for Frame Height 30-46mm with Grounding Clip     |
| C-U/30/46        |                             | PV-ezRack, Akashi Clamp for Frame Height 30-46mm                         |



REF: CL-825-S-REV1  
Internal REF: 00569

We find the PM8-A to be structurally sufficient for Australian use, based on the following conditions:

- Wind Loads to AS/NZ1170.2:2021:
  - Design life: 25 years
  - Wind Terrain Category: 2;
  - Wind average recurrence interval of 100 years- for ultimate state, 25 years- service-ability;
  - Wind region A, B1, and B2;
- Max Solar Panel Length 1.8m, width 1.15m;
- Panel weight calculated: 23.8 kg
- Number of rails per panel: 3
- Yield Strength:
  - Steel: 300 MPa,
  - Aluminium: 240 MPa;
- Maximum tilt angle options: refer to tables;
- Dimensions as shown on the below picture;

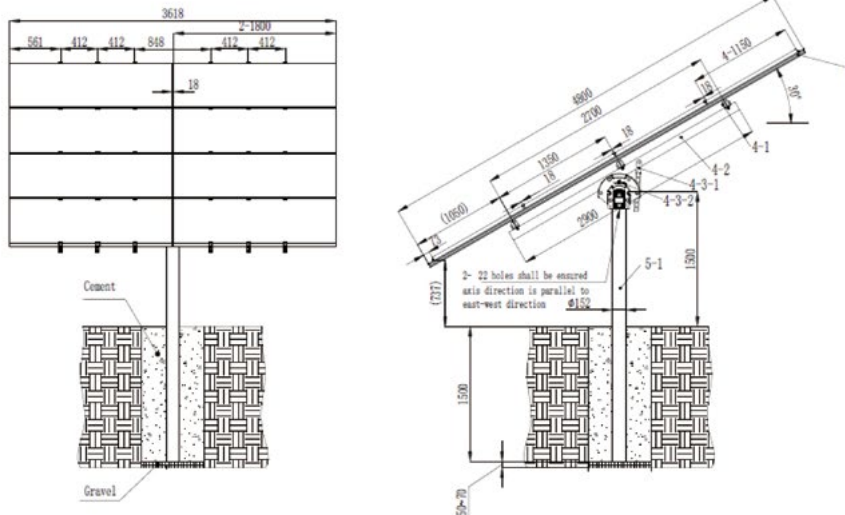

**Maximum Tilt Angle Options**



REF: CL-825-S-REV1  
Internal REF: 00569

|                                                                                                  | Wind Region                                                                            |           |           |          |          |
|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-----------|-----------|----------|----------|
|                                                                                                  | Region A                                                                               | Region B1 | Region B2 | Region C | Region D |
| Wind regional speed (m/s)                                                                        | 41                                                                                     | 48        | 48        | N/A      | N/A      |
| Maximum tilt angle (°)                                                                           | 30                                                                                     | 20        | 10        | N/A      | N/A      |
| Soil Type                                                                                        | Post Embedded in concrete pier:<br>300 mm diameter concrete piers<br>minimum depth (m) |           |           |          |          |
| <b>Hard or very dense soil</b><br>[Gravels; dry (hard) clays]                                    | 1.45                                                                                   | 1.50      | 1.53      | N/A      | N/A      |
| <b>Very Firm or dense soil</b><br>[Dry (Stiff) clays; clayey sands; coarse sands; compact sands] | 1.66                                                                                   | 1.70      | 1.73      | N/A      | N/A      |
| <b>Firm or medium dense soil</b><br>[Damp clays; sandy clays; damp sands]                        | 1.88                                                                                   | 1.91      | 1.95      | N/A      | N/A      |
| <b>Soft or loose soil</b><br>[wet clays; silty clays and sands; silty loams; wet loose sands]    | 2.45                                                                                   | 2.50      | 2.55      | N/A      | N/A      |

#### Notes:

1. The assessment is based on the capacity of the fixings and the solar array frame. This document does not include or certify the PV panel; however, both the panel weight and geometry have been considered when designing the array frame.
2. Clamping zone of the PV panels must be according to the manufacturer's specifications.
3. For Terrain Category (TC) definition, please refer to clause 4.2.1 of AS/NZS 1170.2:2021.
4. Wind Direction Multiplier (Md) taken as 1.0. Refer to clause 3.3 of AS/NZS 1170.2:2021 for more information.
5. Shielding Multiplier (Ms) taken as 1.0. Refer to clause 4.3 of AS/NZS 1170.2:2021 for more information.
6. Topographic Multiplier (Mt) taken as 1.0. Refer to clause 4.4 of AS/NZS 1170.2:2021 for more information.
7. This certificate cannot be used if the site is located on a hill, ridge or escarpment. Contact Clenergy if the aforementioned condition is met on site.
8. No consideration has been taken on the effect of snow loads. In case the roof is located in a snow prone area, a project specific design must be completed.
9. Contact Clenergy if pier diameter requirements is different from 300 mm.



REF: CL-825-S-REV1  
Internal REF: 00569

10. Footing depths are for reference only.
11. For concrete pier foundations, use a minimum 25 Mpa concrete compressive strength should be used.
12. According to AS 1726.1993 (Geotechnical site investigations), the soil can be identified as per below table (\*)

| Soil Type                                                                                        | Soil Parameters              |                              |                                               | Visual Classification Based on texture                                    |                                                                                      |
|--------------------------------------------------------------------------------------------------|------------------------------|------------------------------|-----------------------------------------------|---------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                                                                                                  | Bearing capacity Clays (kPa) | Bearing capacity Sands (kPa) | Field guide                                   | Clay                                                                      | Sand                                                                                 |
| <b>Hard or very dense soil</b><br>[Gravels; dry (hard) clays]                                    | > 200                        | > 300                        | Can be indented with difficulty by thumb nail | Particles may be described as powdery, can be moulded, playdough texture. | Particles may be described as 'rounded', 'sub-rounded', 'sub-angular', or 'angular'. |
| <b>Very Firm or dense soil</b><br>[Dry (Stiff) clays; clayey sands; coarse sands; compact sands] | 100-200                      | 300                          | Can be indented by thumb nail                 |                                                                           |                                                                                      |
| <b>Firm or medium dense soil</b><br>[Damp clays; sandy clays; damp sands]                        | 25-50                        | 150                          | Can be moulded by strong finger pressure      |                                                                           |                                                                                      |
| <b>Soft or loose soil</b><br>[wet clays; silty clays and sands; silty loams; wet loose sands]    | > 12 - 25                    | < 50                         | Can be moulded by light finger pressure       |                                                                           |                                                                                      |


(\*) the above table is only for guidance and it must not be taken for final installations.

13. This certificate cannot be used if the following is present on the soil:
  - a. **Organic matter** such as: Fibrous peat, charcoal, wood fragments, root and root fibres.
  - b. **Waste fill** such as: Domestic refuse, oil, bitumen, brickbats, concrete rubble, fibrous plaster, wood pieces, wood shavings, sawdust, iron filings, drums, steel bars, steel scrap, bottles, broken glass and leather.
14. We highly recommend to check the characteristics of the soil on site by a geotechnical expert. Clenergy must be informed on the outcome of the soil report.
15. The following soil and/or terrain conditions are not covered on this engineering certificate and we highly recommend to carry out a soil test report if you find the below conditions on site.



REF: CL-825-S-REV1  
Internal REF: 00569

- a. Unstable slopes
  - b. Soil with visible poor drainage
  - c. Uncontrolled fill
  - d. Areas close to a river/creek
  - e. Undulating, hilly, or mountainous terrains
16. ER-R-ECO Rail splice must not be placed at the end of the rail or on top of rail overhang.
17. ER-R-ECO Rail must be continuous to comply with Note 16.
18. Rail splice should be placed within  $\frac{1}{3}$  length (L) of the nearest rail support.

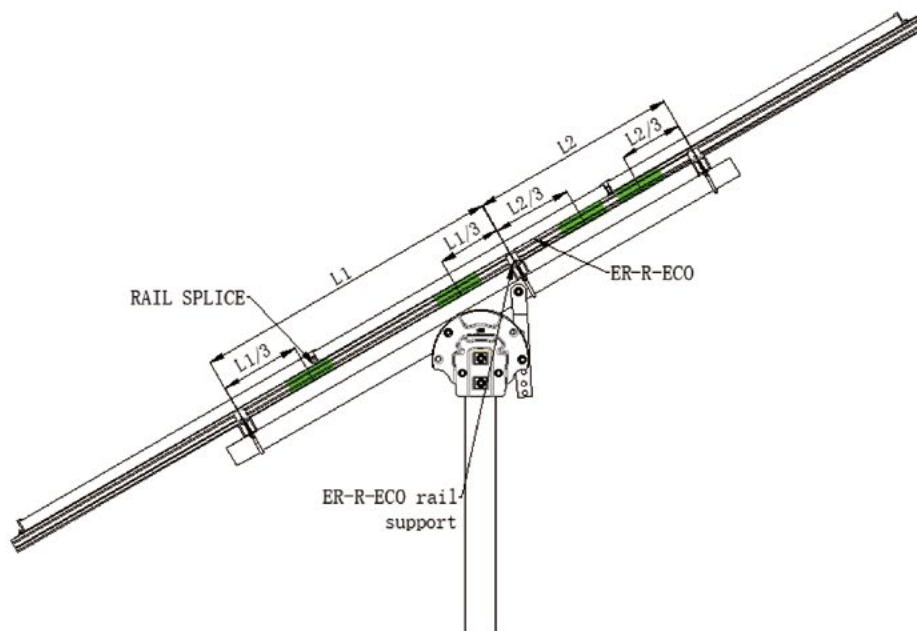

19. System is suitable for installation up to ISO corrosivity category C4.
20. From the date of publication onwards, any amendment made to any of the above-mentioned Standards will make this report outdated and a new one will have to be released, unless the amendment has no implications on this certificate.
21. All components from Clenergy must be installed according to manufacturer's specification and the instructions shown in the relevant installation manual. Please check the Clenergy Australia website or contact them for access to the most recent installation manuals.



**MW Engineering**

REF: CL-825-S-REV1  
Internal REF: 00569

Should you have any queries, do not hesitate to contact us.

Best Regards,



Alberto Escobar  
Civil/Structural Engineer  
**BEng MIEAust NER**  
PE 0003615  
RPEQ 18759  
BDC 3134  
BPB (NT) 262228ES  
BSP (TAS) 845530344  
[info@mwengineering.melbourne](mailto:info@mwengineering.melbourne)



Be the World-Leading Technology Enterprise  
Leading towards a Sustainable Future

**CLENERGY**

1001-1009 Min'an Road, Torch Hi-tech Zone,  
Xiang'an District 361101,  
Xiamen, Fujian, China

☎ +86 592 311 0088

✉ [sales@clenergy.com](mailto:sales@clenergy.com)

🌐 [www.clenergy.com](http://www.clenergy.com)

Last Updated - Sep. 2026 | V4.0