






## Assembly

	
Used as End Clamp	Used as Inter Clamp

## Component

	
Akashi Clamp for Frame Height 30-46mm (Black Anodised) Part No.: C-U/30/46/BA, C-U/30/46-G/BA	

## Technical Specification

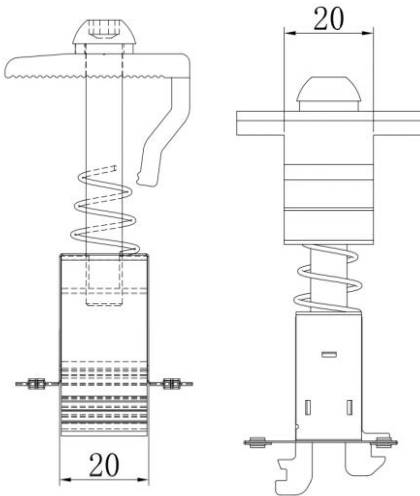Application	C-U/30/46/BA and C-U/30/46-G/BA are for framed PV Modules of 30-46mm in height	
Requirement	C-U/30/46/BA and C-U/30/46-G/BA need 20mm space on each side of the Rail, need 20mm space between PV Modules;	
Recommended Torque	<b>End Clamp:</b> 13-16N·m <b>Inter Clamp:</b> 13-16N·m	
Weight	<b>C-U/30/46/BA:</b> 0.068 kg <b>C-U/30/46-G/BA:</b> 0.072 Kg	
Packaging	30 units per pack, 4 packs (120 units) per carton;	
Material	Main parts: AL6005-T5 Fasteners and Grounding Clip: SUS 304	
Color	Black (Anodised, no less than 10 µm)	
Standard	AS/NZS 1170.2:2021	