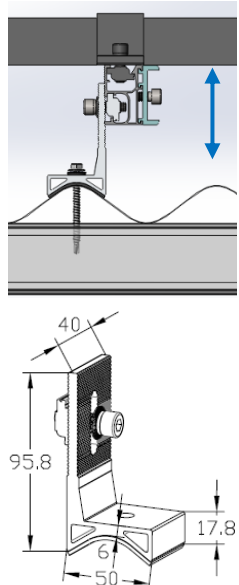


## SolarRoof, Tin Interface with Curved Base for Corrugated Roof

### Component

|                                                                                                                        |                                                                                     |
|------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                       |  |
| Tin Interface with Curved Base for Corrugated Roof (Z Module+ Bolt + Universal Screw)<br>Part No.: ER-I-25, ER-I-25/BA |                                                                                     |

### Technical Specification

|                     |                                                                               |                                                                                                                     |
|---------------------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Application         | Corrugated Tin Roof                                                           |  <p>Clearance<br/>89~104mm</p> |
| Purlin requirement  | Metal or Timber purlin                                                        |                                                                                                                     |
| Screw specification | Buildex 14-11 x 70 (14 gauge, 6.3 mm, 11 TPI, 70 mm long) Hex Head Zips Screw |                                                                                                                     |
| EPDM                | Pre-fitted (2mm thickness)                                                    |                                                                                                                     |
| Dimensions          | L40mm*W50mm*H95.8mm                                                           |                                                                                                                     |
| Packaging           | 40 units per pack; 4 packs (160 units) per carton                             |                                                                                                                     |
| Material            | Main Structure: AL6005-T5<br>Bolts/washers/nuts: SUS 304                      |                                                                                                                     |
| Weight              | 0.139 kg                                                                      |                                                                                                                     |
| Color               | Silver (anodized, no less than 10 $\mu$ m)<br>Black (full anodized)           |                                                                                                                     |
| Standard            | AS NZS1170.2-2011                                                             |                                                                                                                     |