
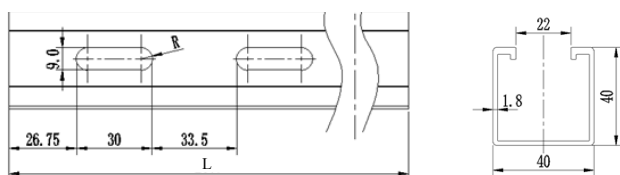


Cable Tray

Technical Specification

Load Rating and Deflection

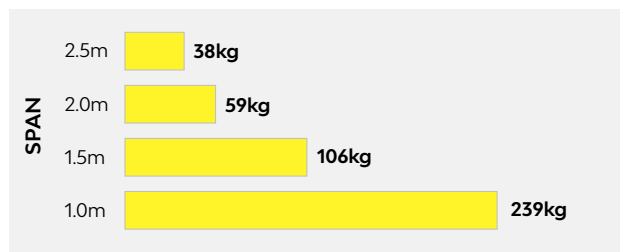

Part No. (Ordering Code)	EZ-CT-40/40/2560, CR-CT-40/40/3000		
Application	Fix Solar DC Cables	Packaging	1020 pcs per pallet
Fixing Method	Fix on the Elite, ECO, TUNNAL or T rail with Z module	Material	AL/6005-T5
Dimensions	L2560 or 3000mm*W40mm*H40mm	Finish	Mill Finish
Weight	0.676 kg/m	Standard	AS/NZS1866


Cover

Technical Specification

Assembly



Components

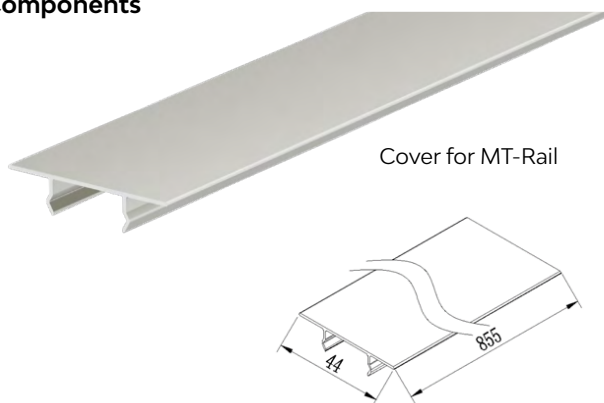

Cover for MT-Rail

Part No. (Ordering Code)	CO-MT/855		
Application	Cover for MT-Rail Cable Tray	Packaging	30 units per carton
Fixing Method	Click in MT-Rail Cable Tray	Material	AL/6005-T5
Dimensions	L855mm*W44mm*H9.52mm	Finish	Mill Finish
Weight	0.135kg	Standard	AS/NZS1866

Accessories



CR-I-01
Tin Interface for
Cable Tray



EZ-SP-MT/CT
Splice Plate for
MT-Rail Cable Tray



CR-DM/BWS
Diamond Module Assembly
with Bolt M8*20
and Large Washer



CR-T-40/40
Tee Junction 40*40 mm



CR-B-40/40
90 Degree Bend 40*40 mm

Note:

Standards --- AS/NZS 1866, AS 2837

