





Isolator Shade Side Plate

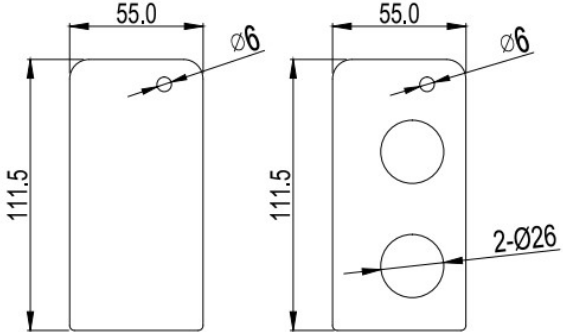
Assembly

| | |
|---|--|
|  |  |
| Side Plate Assembly with Isolator Shade | Side Plate with Two Conduit Inserts Assembly with Isolator Shade |

Component

| | | | |
|---|---|---|--|
|  |  |  |  |
| Isolator Shade Side Plate Part No.: P-SR/IS (bar code: 10-007-00874) | Isolator Shade Side Plate, Black Anodised Part No.: P-SR/IS/BA (bar code: 10-007-00875) | Isolator Shade Side Plate with Two Conduit Inserts Part No.: P-2CI-SR/IS (bar code: 10-007-00876) | Isolator Shade Side Plate with Two Conduit Inserts, Black Anodised Part No.: P-2CI-SR/IS/BA (bar code: 10-007-00877) |

Technical Specification

| | | |
|----------------------------|---|--|
| Application | Install with Isolator Shade, for PV Array DC Isolators |  |
| Fixing Method | Fixing on two sides of Isolator Shade with Bolt M6*14 | |
| Dimension | L111.5mm*W55mm*T1.5mm | |
| Packaging | 720 pcs per carton | |
| Weight | P-SR/IS and P-SR/IS/BA: 0.025 kg/pcs; 18.3 kg/carton P-2CI-SR/IS and P-2CI-SR/IS/BA: 0.020 kg/pcs; 14.7kg/carton | |
| Packaging Dimension | L270*W210*H215mm (carton dimension) | |
| Material | AL1000 series-H24 | |
| Finish | P-SR/IS and P-2CI-SR/IS: Mill Finish; P-SR/IS/BA and P-2CI-SR/IS/BA: Black Anodized (no less than 10 µm) | |