



Inter and End Clamp Standard

Assembly

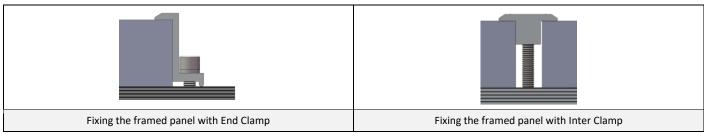

Component

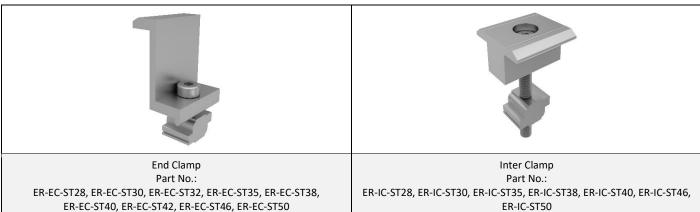

Technical Specification

Application	ER-EC-ST and ER-IC-ST is for framed PV Modules using ECO or T- rails.	
Requirement	ER-EC-ST needs 20mm space on each side of the Rail. ER-IC-ST needs 18mm space between PV Modules	Frame Height
Recommended Torque	16-20N•m	
Packaging	ER-EC-ST: 100 units per pack, 4 packs (400 units) per carton. ER-IC-ST: 100 units per pack, 4 packs (400 units) per carton.	
Material	Main Structure: AL6005-T5 Fasteners: SUS 304	
Color	Silver (anodized, no less than 10 μm)	
Standard	AS NZS1170.2-2011 National Building Code of Canada (NBC) 2020	





