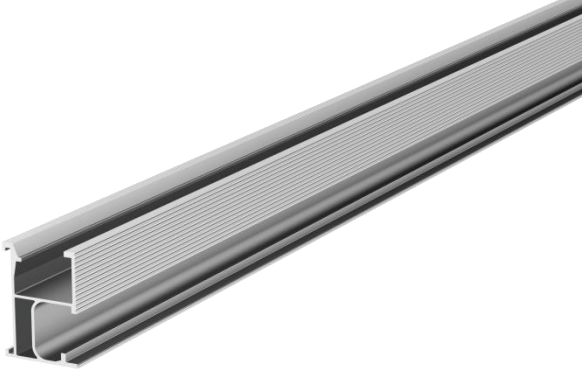

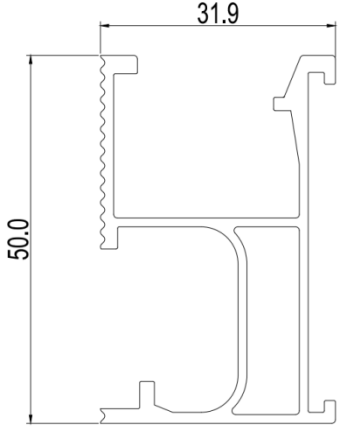


## Elite Rail


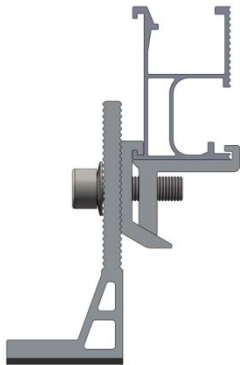
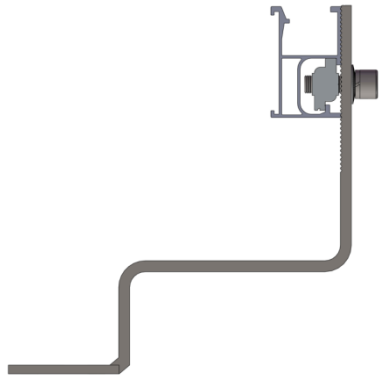






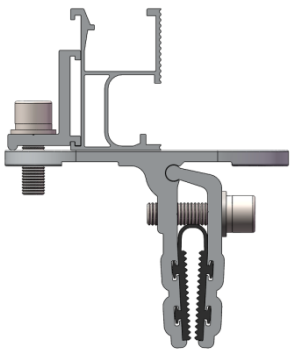
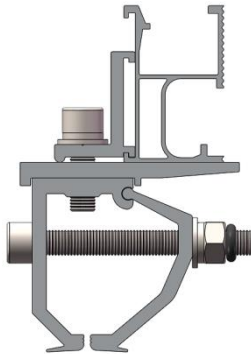
### Component

|   |  |
|---|--|
|  |  |
| <p>Elite Rail<br/>Part No.: ER-R-ELT/XXXX</p>                                     | <p>Elite Rail, Black Anodised<br/>Part No.: ER-R-ELT/XXXX/BA</p>                   |

### Technical Specification

|           |  |   |
|-----------|--|---|
| Roof type | For Clenergy' s PV Mounting System   |  |
| Dimension | W31.9mm*H50.0mm  |   |
| Length    | 3600, 4400, 4600, 4700 and 4800mm  |   |
| Packaging | 90 pcs per pack; 4 packs (360 pcs) per pallet  |   |
| Weight    | 0.695 Kg/m   |   |
| Material  | AL6005-T5  |   |
| Color     | ER-R-ELT/XXXX: Silver (Anodised (no less than 5um, excluding machined surfaces))<br>ER-R-ELT/XXXX/BA: Black (Black Anodised) |   |
| Standard  | AS/NZS 1170.2:2021   |   |

## Assembly

|   |   |   |
|---|---|---|
|    |    |    |
| Installed with Tin Interface  | Installed with ezClick Tin Interface  | Installed with Tile Interface   |
|    |    |    |
| Installed with Elite rail Splice  | Installed with ECO rail Splice  | Installed with Zano Clamp   |
|  |  |  |
| Installed with Akashi Clamp   | Installed with Standard Clamp   | Installed with Klip-lok Interface 400-700HS with Cross Connector Clamp                |
|  |  |   |
| Installed with Klip-lok Interface for longline 305 with Cross Connector Clamp       | Installed with Brooklyn Klip-lok Clamp with Cross Connector Clamp and Plate Kit     |   |