






## Brid - Corrugated Profile Roof Adaptor


### Assembly

			
Rail running parallel to roof rib	Rail running perpendicular to roof rib	Rail running parallel to roof rib	Rail running perpendicular to roof rib
Install with Elite-rail and Tin Interface		Install Eco-rail and Cross Connector Clamp	

### Component


Brid - Corrugated Profile Roof Adaptor, Bridge Forging 2 x Ribs Part No.: ER-AD-B2R (bar code: 10-002-00595)

### Technical Specification
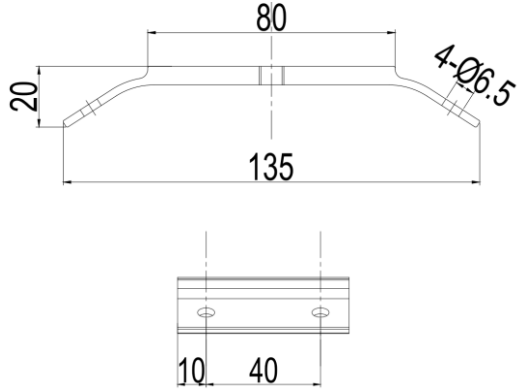
<b>Application</b>	Corrugated Profile Roof	
<b>Screw Specification</b>	4 x Buildex M6-11 x 25 (12 gauge, 6.0 mm, 11 TPI, 25 mm long) Hex Head Tekes with 16 mm Bonded Washer with C4 rated finish; 1 x Hexagon socket head cap screw M8*25	
<b>EPDM</b>	Pre-fitted (2 x 1mm thickness)	
<b>Dimensions</b>	L135mm*W60mm*H20mm	
<b>Packaging</b>	65 units per pack, 2 packs (130 units ) per carton	
<b>Packaging Dimension</b>	L405*W270*H180mm (carton dimension)	
<b>Weight</b>	0.149 Kg; 20 Kg (carton weight)	
<b>Material</b>	Main Structure: AL6005-T5 Self-drilling Screws: Carbon Steel SAE 1022 Bolt/washers: SUS 304 Rubber Pads: EPDM	
<b>Color</b>	Silver (Anodized, no less than 10 µm, excluding machined surfaces)	
<b>Product Warranty</b>	25 years up to Category 4 corrosive environments	